

NASA TECH BRIEF

NASA Headquarters



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.


A Method of Eliminating Hydrogen Maser Wall Shift

The problem:

In an atomic hydrogen maser, hydrogen atoms in the storage bulb collide with the bulb walls causing an unwanted shift (wall shift) in the maser output frequency.

The solution:

The storage bulb is kept at a temperature at which the wall shift is zero, and the effects of bulb size, shape, and surface texture are eliminated.

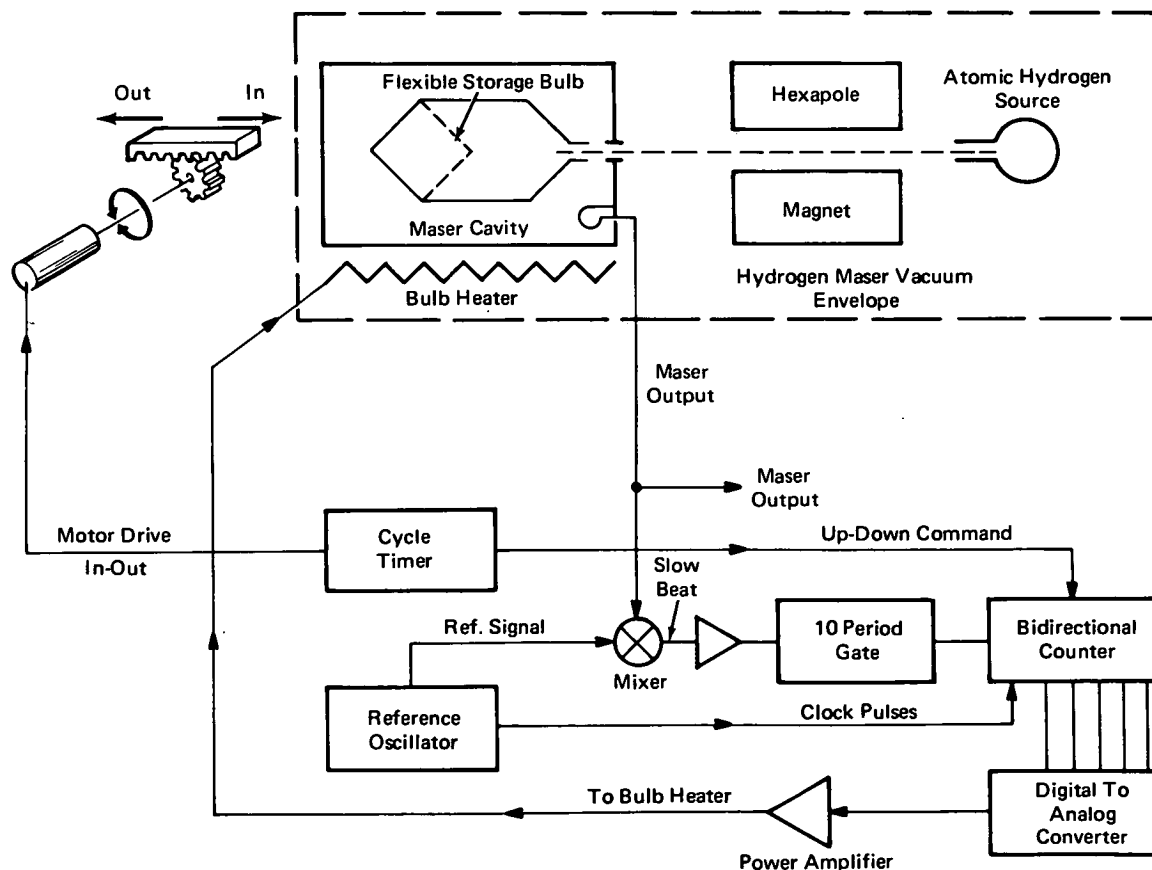

(continued overleaf)

How it's done:

The wall shift may have positive or negative values with respect to the acceleration frequency of the free-hydrogen-atom dipole-moment. Since the wall shift is temperature dependent, there is a temperature at which the shift crosses from a positive to a negative value, and at that temperature the shift is zero. The particular value of this zero-shift temperature is a chemical property of the wall, and the choice of a suitable bulb coating will give a zero wall-shift temperature at which the maser may be conveniently operated. It has been found that a high molecular weight homopolymer of polytetrafluoroethylene can be used to coat the storage bulb to give a zero-shift temperature around 355K.

In order to accurately maintain the desired bulb temperature, a flexible bulb and servo system are used. At the zero-shift temperature the bulb geometry does not affect the maser output frequency; at any other temperature a change in bulb size or shape changes the output frequency. In this temperature control system, a cycling timer moves the flexible end of the bulb in and out every five minutes. If the bulb wall is not at the zero-shift temperature there will be a difference in the maser output frequency between the high- and low-volume bulb configurations. If the bulb is too cold, the frequency difference (high-volume frequency to low-volume frequency) will be positive, if too low, negative.

The figure shows the servo system used. A bidirectional counter measures the period of a fixed number of cycles (10) of the slow beat between the maser and the reference oscillator. The beat signal operates an electronic gate which allows a number of steady "clock" pulses to be counted by the bidirectional counter. When the bulb is in its low-volume configuration, the gate will be open during the ten cycles of the beat, and the counter counts up. When the bulb is in its high-volume configuration, the gate opens for ten cycles, and the counter counts down. The difference is a measure of the frequency difference between the two configurations and is used to operate a digital-to-analog converter which produces a control signal to adjust the bulb temperature.

Note:

Requests for further information may be directed to:
Technology Utilization Officer
NASA Headquarters
Code KT
Washington, D. C. 20546
Reference: B72-10670

Patent status:

NASA has decided not to apply for a patent.

Source: R. F. C. Vessot and M. W. Levine of
Smithsonian Astrophysical Observatory
under contract to
NASA Headquarters
(HQN-10663)